


Preliminary Product Description



Manganin Shunt Resistor for High Precision Current Measurement



Description


The R75-BAR-03D shunt resistor is a precision Cu-Mn resistance. It consists of a copper busbar with hole terminals for easy installation.


The shunt is designed for precision current measurement with high thermal stability in instruments, industrial, and automotive applications, typically including energy meters, ampere meters, power inverters, and battery current monitoring.

Characteristics

Parameter	Typical Value	Unit
Resistance	75 ±5%	μ Ohm
Temperature coefficient	±200	ppm/°C
Temperature coefficient (element material)	±20	ppm/°C
Operation temperature range	-40 to 125	°C
Storage range	-40 to 150	°C
Continuous power	5	W
Maximum power	36	W

Geometry



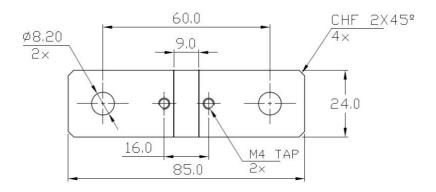



Preliminary Product Description



Please contact us at



maglab AG

Güterstrasse 141 CH-4053 Basel Switzerland

+41 61 261 16 44 info@maglab.ch www.maglab.ch



Permanent Magnets Ltd.

B-3, MIDC Industrial Area, Mira-gaon Miraroad-East, Thane-401107, Maharashtra India

> +91 22 62 16 54 00 shuntinquiry@pml.in www.pmlindia.com